

# SMT

## Fitting Instructions

### Steel Slimline Towel Rail

Please read these instructions and terms and conditions carefully prior to installation.  
Failure to do so may invalidate the warranty.



## Drawings

Fig.1


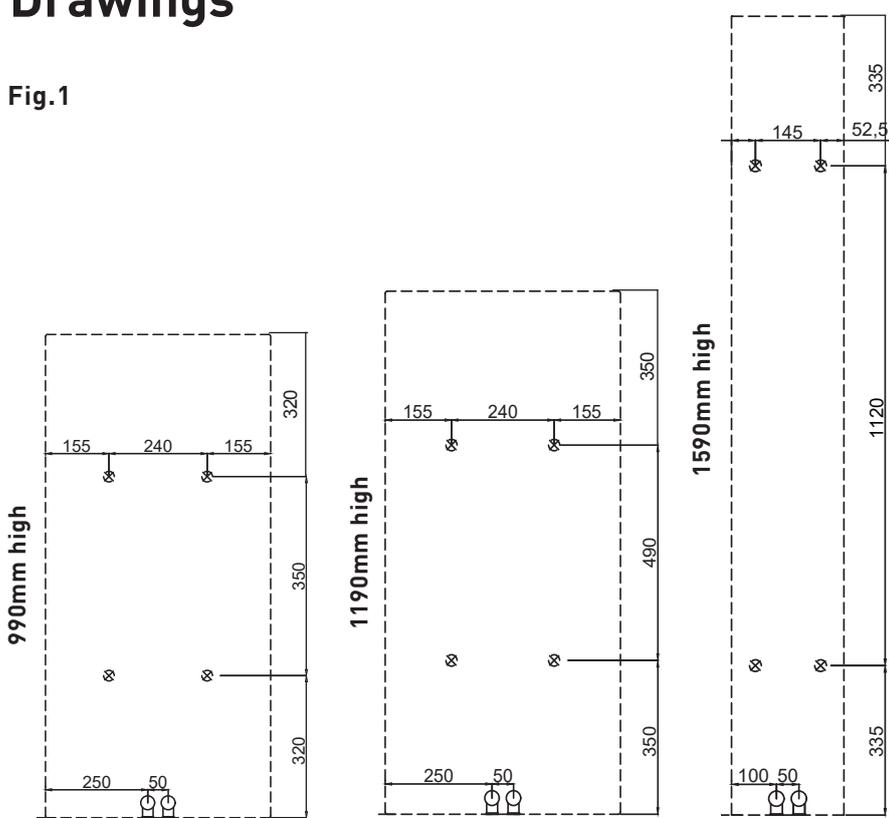


Fig.2

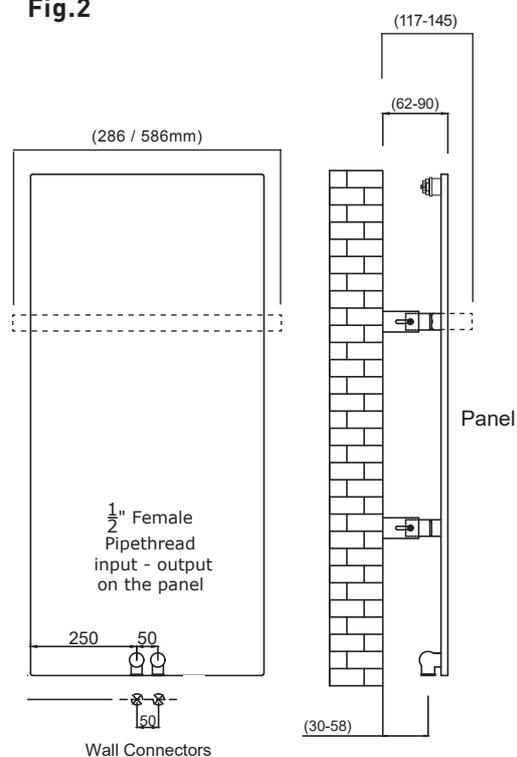

## Pipe Centres

Pipe centres left to right = 50mm

Pipe centres from wall = 30mm - 58mm

Depth from wall = 117mm - 145mm  
(including towel bar)


## 1. Unpack & Inspect

This product should have reached you in perfect condition. Please carefully unpack and inspect this towel rail and all fittings. Your point of purchase must be notified of any shortages or damage within 28 days of delivery.

## 2. Contents

### You should have:

- 1 Towel Rail
- 2 Panel mounts
- 2 Wall mounts
- 4 Screws
- 4 Wall Plugs
- 4 Bolts
- 4 Spring Washers
- 4 M8 Nuts
- 1 Airvent

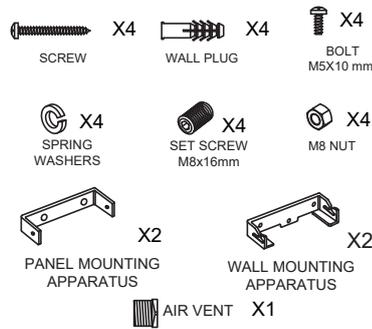


### You will need:

- Electric Drill / Bits
- Spanner
- Tape measure
- Allen Key
- Screwdriver
- Spirit level

## 3. Fix wall mounts to wall



Refer to **Fig.1** (overleaf) to get the fixing positions to fix the wall mounts onto the wall as illustrated below.

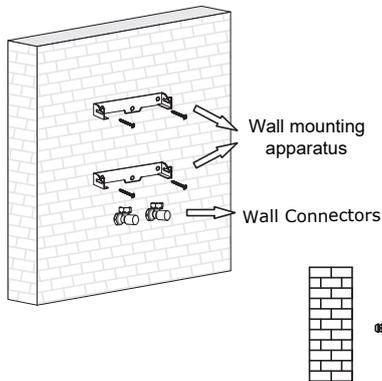

## 4. Fit panel mounts

Fix the panel mounts to the back of the towel rail as shown right.

Maximum tightening torque should not exceed 6 N-m. Do not take off the edge and surface protective materials until all plumbing work is finished.

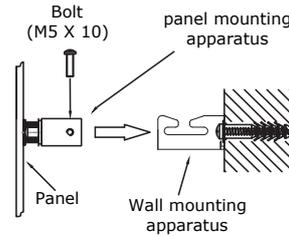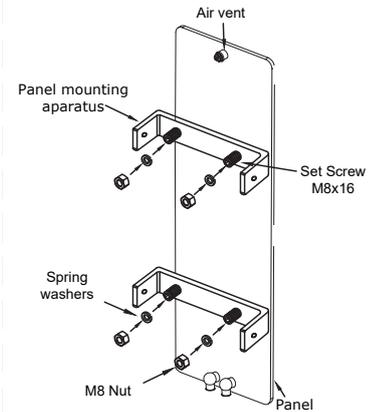

Hold the product carefully and insert the panel mounts into the wall mounts and then fit by tightening the bolt.

**PLEASE NOTE:** It is essential that all brackets are level to ensure a vertical alignment for connecting the pipework.

## 5. Commission

Please Note: In accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend flushing the heating system post installation of new radiators and then adding the correct quantity and type of inhibitor for use with your radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer's guarantee.

## Technical Specifications

<b>Materials</b>	Mild Steel
<b>Connections</b>	½" flow and return.
<b>Test pressure</b>	8 Bar
<b>Testing authority</b>	BS EN442
<b>Maximum operating pressure</b>	6 Bar
<b>Maximum working temperature</b>	95 °C
<b>Packaging</b>	Wrapped in polyethylene with cardboard box

**PLEASE NOTE:** Systems using micro bore pipework must have adequate pressure and flow rates for the number and style of radiators on the system

We recommend cleaning these towel rails using a non-abrasive product and a soft cloth.

## Guarantees & Liabilities

This product is guaranteed for 10 years. The guarantee is subject to the products being installed in accordance with British and or European standards as well as these fitting instructions. The guarantee in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to us.

## Terms & Conditions

All products must be inspected once removed from the packaging and your point of purchase notified within 28 days of delivery of any scratches, blemishes or other damage. Your point of purchase will then agree appropriate action.

Imperfect radiators should therefore not be fitted and your point of purchase will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If your point of purchase are not notified within 28 days of the date on the signed delivery note then it will be deemed that they have fully complied with their obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims. Your point of purchase recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation, they cannot accept responsibility for items damaged after delivery.